



OPTRIBUTION
powered by DEV



THE ART OF ENGINEERING

Optribution Alpha Outdoor Chassis



The final products may vary from the above images depending on the options selected.

Product and Options

| | |
|-------------------------------|---|
| DEV 7185 | Optribution Polycarbonate Outdoor Chassis Alpha; up to 8 Channels |
| DEV 7186 | Optribution Aluminum Outdoor Chassis Alpha; up to 8 Channels |
| DEV 7187 | Optribution Aluminum Outdoor Chassis Alpha; up to 16 Channels |
| Option 101 | Alpha Optical Transmitter; 4*Tx; 850...2450 MHz; SC/APC |
| Option 102 | Alpha Optical CWDM Transmitter; CWDM Channels 1...4; 850...2450 MHz; SC/APC |
| Option 103 | Alpha Optical CWDM Transmitter; CWDM Channels 5...8; 850...2450 MHz; SC/APC |
| Option 104 | Alpha Optical CWDM Transmitter; CWDM Channels 9...12; 850...2450 MHz; SC/APC |
| Option 105 | Alpha Optical CWDM Transmitter; CWDM Channels 13...16; 850...2450 MHz; SC/APC |
| Option 111 | Alpha Optical Receiver; 4*Rx; 850...2450 MHz; SC/APC |
| Option 151 | Alpha Input/Output; 4*RF Port; 75 Ohm, F (f) |
| Option 152 | Alpha Input/Output; 4*RF Port; 50 Ohm, SMA (f) |
| Option 155 | Alpha 1+1 Tx Redundancy; 4*RF Splitter; 75 Ohm, F (f) |
| Option 156¹ | Alpha 1+1 Rx Redundancy; 4*RF Switch; 75 Ohm, F (f) |
| Option 157¹ | Alpha 1+1 Tx Redundancy; 4*RF Splitter; 50 Ohm, SMA (f) |
| Option 158¹ | Alpha 1+1 Rx Redundancy; 4*RF Switch; 50 Ohm, SMA (f) |
| Option 161 | Alpha 1:4 CWDM De-/Multiplexer; CWDM Channels 1...4 |
| Option 162 | Alpha 1:8 CWDM De-/Multiplexer; CWDM Channels 1...8 |
| Option 163 | Alpha 1:16 CWDM De-/Multiplexer; CWDM Channels 1...16 |

Features

- 3 different Outdoor Chassis for up to 16 Optical Channels
- Optical Transmitter and Receiver Modules with four Channels each
- Different CWDM Transmitter Modules and De-/Multiplexer
- Variable Gain
- LNB Powering, switchable 13/18 V and 22 kHz Tone
- 1+1 Redundancy Options
- SNMP Support (Option¹)
- DEV Web Interface (Option¹)
- Signal Recording (Option¹)
- Power Supply Redundancy Option
- Interoperability with the DEV Optribution Series
- **7 Years Warranty**


Note 1: DEV 7187 only

DEV 7185

Optribution Polycarbonate Outdoor Chassis Alpha; up to 8 Channels

DEV 7186

Optribution Aluminum Outdoor Chassis Alpha; up to 8 Channels

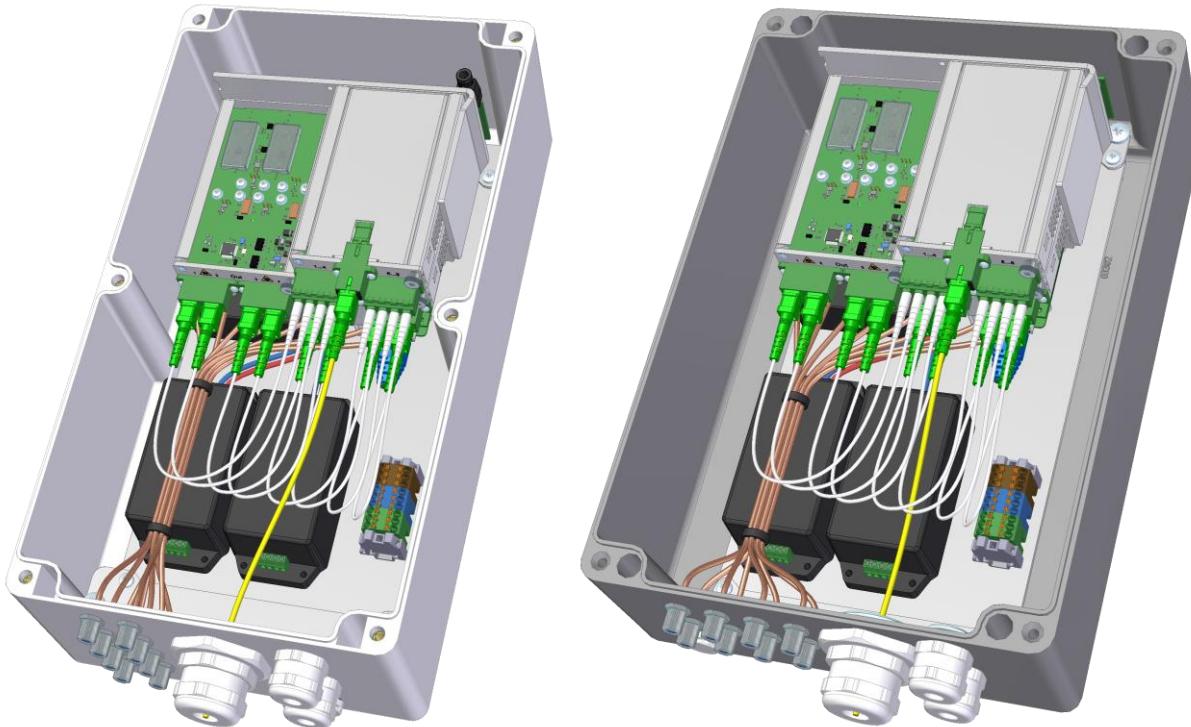

Both outdoor chassis can be equipped with up to two optical modules, i.e. up to 8 optical channels.
 The RF ports (with and without redundancy functionality) are installed below the optical modules.
 In addition, a slot located above the optical modules can be equipped with a CWDM de-/multiplexer.

Technical Data

| | Value | Condition | |
|-------------------------------|--------------------------------|--|--|
| Capacity | | | |
| Slots for Optical Modules | 2 | | |
| Power Supply | | | |
| Supply Voltage | 100...240 V AC | | |
| Power Consumption | <60 VA | | |
| General Specifications | | | |
| | DEV 7185 | DEV 7186 | |
| Size | Width Height Depth | 14.2" (360 mm) 7.9" (200 mm) 5.9" (150 mm) | 13.0" (330 mm) 9.0" (230 mm) 4.3" (110 mm) |
| Weight | ~3.1 kg | ~4.7 kg | Without external Connectors |
| Operating Temperature | -30...+60 °C (-22...+140 °F) | | |
| Ingress Protection Rating | IP65 | | |
| Environmental Conditions | ETS 300019 Part 1-3 Class 3.1E | | Except Temperature and Ingress Protection Rating |

DEV 7187 Optribution Aluminum Outdoor Chassis Alpha; up to 16 Channels



The DEV 7187 outdoor chassis can be equipped with up to four optical modules, i.e. up to 16 optical channels. The RF ports (with and without redundancy functionality) are installed below the optical modules. In addition, a slot located above the optical modules can be equipped with a CWDM de-/multiplexer. Optionally, the DEV 7187 can be equipped with a CPU for Monitoring and Control via Web Interface and via SNMP (Option 59).

Technical Data

| | Value | Condition |
|-------------------------------|--|---|
| Capacity | | |
| Slots for Optical Modules | 4 | |
| Redundant Power Supply | | |
| Supply Voltage | 100...240 V AC | |
| Power Consumption | <60 VA | |
| General Specifications | | |
| Size | 15.7" (400 mm) Width, 12.2" (310 mm) Height, 4.3" (110 mm) Depth | Without external Connectors |
| Weight | ~9.1 kg | Without Modules |
| Operating Temperature | -30...+60 °C (-22...+140 °F) | |
| Ingress Protection Rating | IP65 | |
| Environmental Conditions | ETS 300019 Part 1-3 Class 3.1E | Except Temperature and Ingress Protection Rating |



1:1 Optical Link Specification

The link specifications apply for an optical link realized via an optical 1:1 connection of the single channels of the Alpha Optical Transmitter (Option 101) and of the Alpha Optical Receiver (Option 111).

For the RF connection, Alpha Input/Output RF Ports (Option 151 or Option 152) are applied on both sides of the optical link.

| | Value | Condition |
|--------------------------------|--|---|
| Frequency Range | 850...2450 MHz | |
| Link Gain | 0±3 dB | @ +25 °C / 77 °F |
| Variable Gain | -15...+13 dB ±0.5 dB; Step Size 0.5 dB | |
| Gain Stability vs. Temperature | <0.4 dB per 10 °C change | -30...+60 °C (-22...+140 °F) |
| Return Loss all Ports | >16 dB typ. >14 dB min. | |
| Flatness | ±1.5 dB ±0.2 dB | 850...2450 MHz @ +25 °C In any 36 MHz Window |
| Group Delay Distortion | <0.2 ns | In any 36 MHz Window |
| Nominal RF Input Level | -30 dBm | Aggregated Power |
| Input Power dynamic Range | -50...-20 dBm | Aggregated Power, Note 1 |
| Damage RF Input Level | +10 dBm | Aggregated Power |
| Noise Figure | ≤30 dB | |
| CNR | >30 dB | Notes 2, 3 |
| Output IP3 | >7 dBm | Notes 3, 4 |
| OP1dB | >-10 dBm | Notes 3, 4 |
| IM3 | >40 dBc | @ 2 Tones, -28 dBm each |
| Transmission Distance | <3 km | |
| Optical Budget | 1 dB | Note 5 |


Note 1: minimum 10 dB CNR Margin within any 36 MHz window

Note 2: $P_{in} = -30$ dBm

Note 3: with back-to-back fiber connection (2 m)

Note 4: variable gain set to +13 dB

Note 5: including 2 * SC/APC connector loss

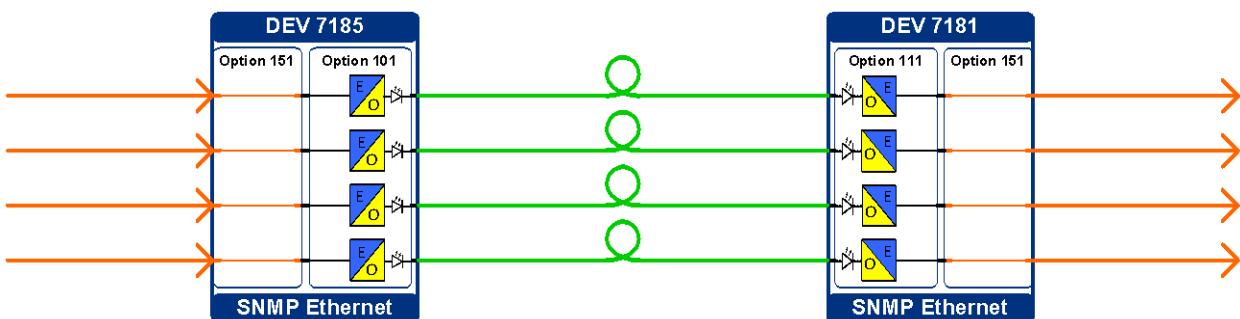



1+1 Redundancy Optical Link Specification

The link specifications apply for an optical link realized via an optical 1+1 redundancy connection of the single channels of the Alpha Optical Transmitter (Option 101) connected to the Alpha 1+1 Tx Redundancy (Option 155) and of the Alpha Optical Receiver (Option 111) connected to the Alpha 1+1 Rx Redundancy (Option 156).

| | Value | Condition |
|--------------------------------|--|---|
| Frequency Range | 850...2450 MHz | |
| Link Gain | 0±3 dB | @ +25 °C / 77 °F |
| Variable Gain | -15...+13 dB ±0.5 dB; Step Size 0.5 dB | |
| Gain Stability vs. Temperature | <0.3 dB per 10 °C change | -30...+60 °C (-22...+140 °F) |
| Return Loss all Ports | >16 dB typ. >14 dB min. | |
| Flatness | ±2.0 dB ±0.2 dB | 850...2450 MHz @ +25 °C In any 36 MHz Window |
| Group Delay Distortion | <0.2 ns | In any 36 MHz Window |
| Nominal RF Input Level | -30 dBm | Aggregated Power |
| Input Power dynamic Range | -50...-20 dBm | Aggregated Power, Note 1 |
| Damage RF Input Level | +13 dBm | Aggregated Power |
| Noise Figure | ≤34 dB | |
| CNR | >30 dB | Notes 2, 3 |
| Output IP3 | >7 dBm | Notes 3, 4 |
| OP1dB | >-10 dBm | Notes 3, 4 |
| IM3 | >44 dBc | @ 2 Tones, -28 dBm each |
| Transmission Distance | <3 km | |
| Optical Budget | 1 dB | Note 5 |


Note 1: minimum 10 dB CNR Margin within any 36 MHz window

Note 2: $P_{in} = -30 \text{ dBm}$

Note 3: with back-to-back fiber connection (2 m)

Note 4: variable gain set to +13 dB

Note 5: including 2 * SC/APC connector loss

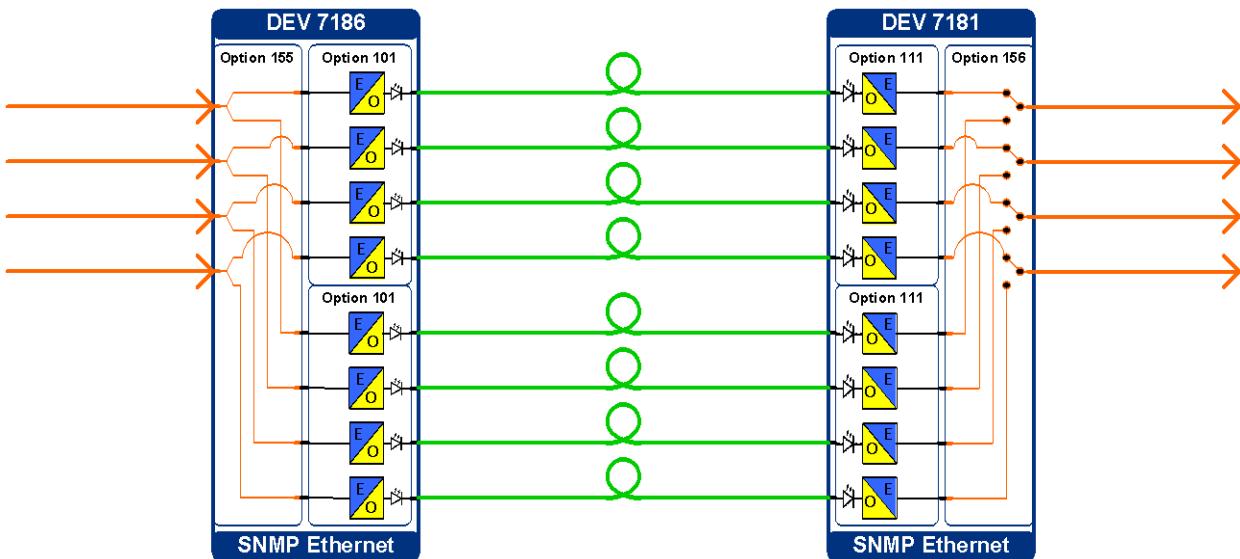



CWDM Optical Link Specification

The link specifications apply for an optical link realized via an optical 1:1 connection of the single channels of the Alpha Optical CWDM Transmitter (Option 102, Option 103, Option 104, or Option 105) and of the Alpha Optical Receiver (Option 111). For combining the optical signals at the transmitter side, and to split the optical signal at the receiver side, Alpha CWDM De-/Multiplexers (Option 161, Option 162, or Option 163) are used. For the RF connection, Alpha Input/Output RF Ports (Option 151 or Option 152) are applied on both sides of the optical link.

| | Value | Condition |
|--------------------------------|--|--|
| Frequency Range | 850...2450 MHz | |
| Link Gain | 0±3 dB | @ +25 °C / 77 °F |
| Variable Gain | -15...+13 dB ±0.5 dB; Step Size 0.5 dB | |
| Gain Stability vs. Temperature | <0.3 dB per 10 °C change <0.1 dB per 10 °C change | -30...+50 °C (-22...+122 °F) -30...+40 °C (-22...+104 °F) |
| Return Loss all Ports | >16 dB typ. >14 dB min. | |
| Flatness | ±1.5 dB ±0.2 dB | 850...2450 MHz @ +25 °C In any 36 MHz Window |
| Group Delay Distortion | <0.2 ns | In any 36 MHz Window |
| Nominal RF Input Level | -30 dBm | Aggregated Power |
| Input Power dynamic Range | -50...-20 dBm | Aggregated Power, Note 1 |
| Damage RF Input Level | +10 dBm | Aggregated Power |
| Noise Figure | ≤30 dB | |
| CNR | >30 dB | Notes 2, 3 |
| Output IP3 | >7 dBm | Notes 3, 4 |
| OP1dB | >-10 dBm | Notes 3, 4 |
| IM3 | >40 dBc | @ 2 Tones, -28 dBm each |
| Transmission Distance | <15 km | |
| Optical Budget | 5 dB | Note 5 |


Note 1: minimum 10 dB CNR Margin within any 36 MHz window

Note 2: Pin = -30 dBm

Note 3: with back-to-back fiber connection (2 m)

Note 4: variable gain set to +13 dB

Note 5: including 2 * SC/APC connector loss

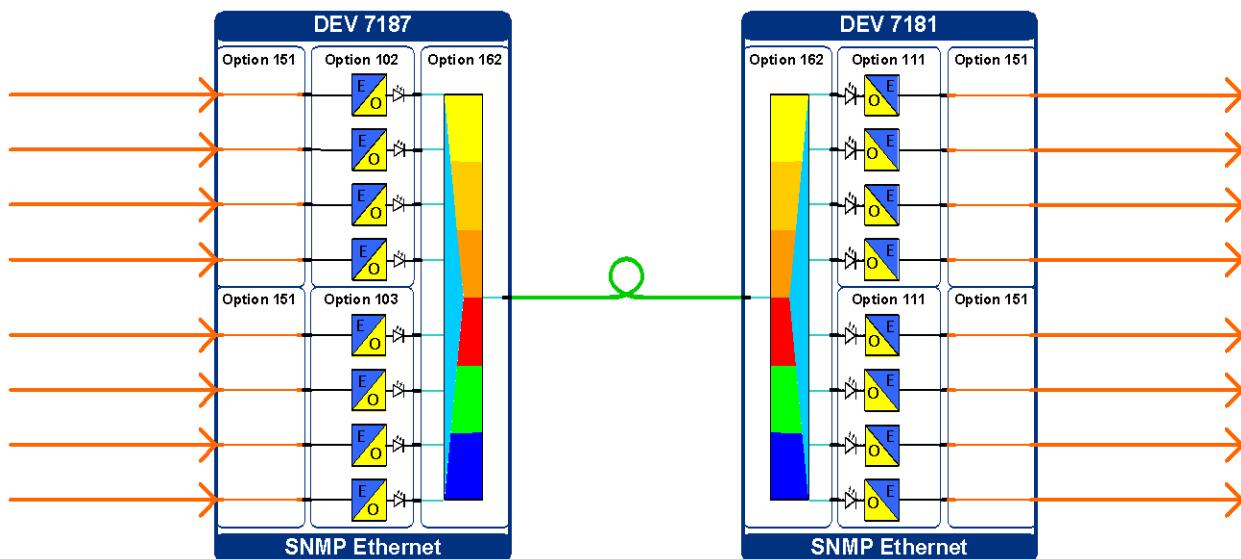

Option 101 - Alpha Optical Transmitter; 4*Tx



The Alpha Optical Transmitter provides 4 optical output channels.

| | Value | Condition |
|--|---|--|
| Optical Specifications | | |
| Optical Output Channels | 4 | |
| Fiber Type | Single Mode 9/125 µm | |
| Optical Connectors | SC/APC | |
| Laser Class (according to IEC 60 825-1) | Class 1M (low Risk to Eyes, no Risk to Skin) | |
| Wavelength | 1310 nm nominal | |
| Optical Output Power | 0.5 mW / -3 dBm | |
| RF Sensing | | |
| Adjustable Threshold Level | -15 dBm > Threshold Level > -50 dBm | Note 1 |
| Threshold Repeatability | <±0.1 dB | |
| LNB Power | | |
| Voltage and Tone Control | 13 V, 18 V and 0 Hz, 22 kHz | Individually selectable per Channel, Note 1 |
| LNB Power per Channel | max. 200 mA | |
| General Specifications | | |
| Power Consumption Module | 12 V; ~250 mA | Without LNB Power |
| Size | 2.75" (70 mm) Width (one slot) | |
| Weight | ~0.2 kg | |
| Operating Temperature | -30...+60 °C (-22...+140 °F) | |
| Environmental Conditions | ETS 300019 Part 1-3 Class 3.1E | Except Temperature |

Note 1: DEV 7187 in combination with Option 59 only

Option 102 - Alpha Optical CWDM Transmitter; CWDM Channels 1...4

Option 103 - Alpha Optical CWDM Transmitter; CWDM Channels 5...8

Option 104 - Alpha Optical CWDM Transmitter; CWDM Channels 9...12

Option 105 - Alpha Optical CWDM Transmitter; CWDM Channels 13...16

| | | | | |
|--|--|--|--|--|
| The Alpha Optical CWDM Transmitters provide the same specifications as the standard Alpha Optical Transmitter (Option 101), except the CWDM wavelengths: | | | | |
| | | | | |

| Optical Specifications | Value | Option 102 | Option 103 | Option 104 | Option 105 |
|-------------------------------|---|---|--|---|-------------------|
| CWDM Wavelengths | Channels 1...4: 1510 nm ±10 nm 1530 nm ±10 nm 1550 nm ±10 nm 1570 nm ±10 nm | Channels 5...8: 1470 nm ±10 nm 1490 nm ±10 nm 1590 nm ±10 nm 1610 nm ±10 nm | Channels 9...12: 1310 nm ±10 nm 1330 nm ±10 nm 1350 nm ±10 nm 1370 nm ±10 nm | Channels 13...16: 1270 nm ±10 nm 1290 nm ±10 nm 1430 nm ±10 nm 1450 nm ±10 nm | |

Option 111 - Alpha Optical Receiver; 4*Rx



The Alpha Optical Receiver provides 4 optical input channels.

| | Value | Condition |
|-------------------------------|-------------------------------------|--------------------|
| Optical Specifications | | |
| Optical Input Channels | 4 | |
| Fiber Type | Single Mode 9/125 µm | |
| Optical Connectors | SC/APC | |
| Wavelength Range | 1270...1610 nm | |
| RF Sensing | | |
| Adjustable Threshold Level | -15 dBm > Threshold Level > -50 dBm | Note 1 |
| Threshold Repeatability | <±0.1 dB | |
| General Specifications | | |
| Power Consumption Module | 12 V; ~180 mA | |
| Size | 2.75" (70 mm) Width (one slot) | |
| Weight | ~0.2 kg | |
| Operating Temperature | -30...+60 °C (-22...+140 °F) | |
| Environmental Conditions | ETSI 300019 Part 1-3 Class 3.1E | Except Temperature |

Note 1: DEV 7187 in combination with Option 59 only

Option 151 - Alpha Input/Output; 4*RF Port; 75 Ohm, F (f)

Option 152 - Alpha Input/Output; 4*RF Port; 50 Ohm, SMA (f)



The Alpha Input/Output RF Ports provide direct RF access to the four channels of the related optical module.

| | Value | Condition |
|-------------------------------|--------------------------------|-------------------|
| RF Specifications | | |
| Input or Output Ports | 4 | |
| | Option 151 | Option 152 |
| Impedance, Connectors | 75 Ohm, F (f) | 50 Ohm, SMA (f) |
| DC blocked | No | |
| General Specifications | | |
| Size | 2.75" (70 mm) Width (one slot) | |
| Weight | ~0.1 kg | |

Option 155 - Alpha 1+1 Tx Redundancy; 4*RF Splitter; 75 Ohm, F (f)

Option 157 - Alpha 1+1 Tx Redundancy; 4*RF Splitter; 50 Ohm, SMA (f)



The Alpha 1+1 Tx Redundancy options are used for the RF connection to two optical transmitter modules in 1+1 redundancy applications.

| | Value | | Condition |
|-------------------------------|----------------------------------|-------------------|-----------|
| RF Specifications | | | |
| Input Ports | 4 | | |
| | Option 155 | Option 157 | |
| Impedance, Connectors | 75 Ohm, F (f) | 50 Ohm, SMA (f) | |
| DC blocked | No | | |
| General Specifications | | | |
| Size | 5.55" (141 mm) Width (two slots) | | |
| Weight | ~0.2 kg | | |

Option 156 - Alpha 1+1 Rx Redundancy; 4*RF Switch; 75 Ohm, F (f)

Option 158 - Alpha 1+1 Rx Redundancy; 4*RF Switch; 50 Ohm, SMA (f)



The Alpha 1+1 Rx Redundancy option is used for the RF connection to two optical receiver modules in 1+1 redundancy applications.

Note that the Alpha 1+1 Rx Redundancy option is available for a DEV 7187 in combination with Option 59 only.

| | Value | | Condition |
|-------------------------------|----------------------------------|-------------------|-----------|
| RF Specifications | | | |
| Output Ports | 4 | | |
| | Option 156 | Option 158 | |
| Impedance, Connectors | 75 Ohm, F (f) | 50 Ohm, SMA (f) | |
| DC blocked | Yes | | |
| General Specifications | | | |
| Size | 5.55" (141 mm) Width (two slots) | | |
| Weight | ~0.2 kg | | |

Option 161 - Alpha 1:4 CWDM De-/Multiplexer; CWDM Channels 1...4

Option 162 - Alpha 1:8 CWDM De-/Multiplexer; CWDM Channels 1...8

Option 163 - Alpha 1:16 CWDM De-/Multiplexer; CWDM Channels 1...16

The Alpha CWDM De-/Multiplexer provide four, eight, or sixteen optical ports for CWDM applications.

Note that the Alpha 1:16 CWDM De-/Multiplexer option is available for the DEV 7187 only.

| | Value | Condition | | |
|-------------------------------|---|---|--|--|
| Optical Specifications | | | | |
| Optical Connectors | | | | |
| Common Port / Patch Cables | SC/APC / SC/APC | | | |
| De-/Mux Ports / Patch Cables | SC/APC / LC/APC | | | |
| | Option 161 | Option 162 | Option 163 | |
| Number of De-/Mux Ports | 4 | 8 | 16 | |
| CWDM Wavelengths | Channels 1...4: 1510 nm ±10 nm 1530 nm ±10 nm 1550 nm ±10 nm 1570 nm ±10 nm | Channels 1...8: 1510 nm ±10 nm 1530 nm ±10 nm 1550 nm ±10 nm 1570 nm ±10 nm 1470 nm ±10 nm 1490 nm ±10 nm 1590 nm ±10 nm 1610 nm ±10 nm | Channels 1...16: 1510 nm ±10 nm 1530 nm ±10 nm 1550 nm ±10 nm 1570 nm ±10 nm 1470 nm ±10 nm 1490 nm ±10 nm 1590 nm ±10 nm 1610 nm ±10 nm 1310 nm ±10 nm 1330 nm ±10 nm 1350 nm ±10 nm 1370 nm ±10 nm 1270 nm ±10 nm 1290 nm ±10 nm 1430 nm ±10 nm 1450 nm ±10 nm | |
| General Specifications | | | | |
| Size | 2.75" (70 mm) Width (one slot) | 5.55" (141 mm) Width (two slots) | | |
| Weight | ~0.1 kg | ~0.2 kg | | |
| Operating Temperature | -30...+50 °C (-22...+122 °F) | | | |
| Environmental Conditions | ETS 300019 Part 1-3 Class 3.1E | Except Temperature | | |

Option 16 - Redundant Power Supply

With Option 16, a second power supply is installed to provide power supply redundancy for the outdoor chassis.

Option 55 - Change Ethernet to optical Ethernet Interface

A DEV 7187 in combination with Option 59 equipped is enhanced with an optical Ethernet Interface.

■ Option 59 is mandatory for the application of Option 55 in a DEV 7187

Option 59 - CPU for Monitoring and Control via Web Interface and via SNMP

The DEV 7187 is enhanced with a CPU that enables monitoring and control via Web Interface and via SNMP.

■ Option 59 is mandatory for the Alpha 1+1 Rx Redundancy option in a DEV 7187



Option 77 - Signal Recording

With Option 77, the Web Interface of a DEV 7187 in combination with Option 59 additionally provides the Recording Window that permits the visualization and the external storage of transmitter and receiver signal data.

■ Option 59 is mandatory for the application of Option 77 in a DEV 7187

Option 89 - Pole Mount Assembly

| | DEV 7185 | DEV 7186 | DEV 7187 |
|-----------------------------|--------------------------|----------------------------|-----------------|
| Mounting for Pole Diameters | 2.4...7.8" (60...200 mm) | 6.6...10.0" (168...254 mm) | |

Order Information

Product and Options

| | |
|-------------------------|--|
| DEV 7185 | Optribution Polycarbonate Outdoor Chassis Alpha; up to 8 Channels |
| DEV 7186 | Optribution Aluminum Outdoor Chassis Alpha; up to 8 Channels |
| DEV 7187 | Optribution Aluminum Outdoor Chassis Alpha; up to 16 Channels |
| Option 101 | Alpha Optical Transmitter; 4*Tx; 850...2450 MHz; SC/APC |
| Option 102 | Alpha Optical CWDM Transmitter; CWDM Channels 1...4; 850...2450 MHz; SC/APC |
| Option 103 | Alpha Optical CWDM Transmitter; CWDM Channels 5...8; 850...2450 MHz; SC/APC |
| Option 104 | Alpha Optical CWDM Transmitter; CWDM Channels 9...12; 850...2450 MHz; SC/APC |
| Option 105 | Alpha Optical CWDM Transmitter; CWDM Channels 3...16; 850...2450 MHz; SC/APC |
| Option 111 | Alpha Optical Receiver; 4*Rx; 850...2450 MHz; SC/APC |
| Option 151 | Alpha Input/Output; 4*RF Port; 75 Ohm, F (f) |
| Option 152 | Alpha Input/Output; 4*RF Port; 50 Ohm, SMA (f) |
| Option 155 | Alpha 1+1 Tx Redundancy; 4*RF Splitter; 75 Ohm, F (f) |
| Option 156 ¹ | Alpha 1+1 Rx Redundancy; 4*RF Switch; 75 Ohm, F (f) |
| Option 157 | Alpha 1+1 Tx Redundancy; 4*RF Splitter; 50 Ohm, SMA (f) |
| Option 158 ¹ | Alpha 1+1 Rx Redundancy; 4*RF Switch; 50 Ohm, SMA (f) |
| Option 161 | Alpha 1:4 CWDM De-/Multiplexer; CWDM Channels 1...4 |
| Option 162 | Alpha 1:8 CWDM De-/Multiplexer; CWDM Channels 1...8 |
| Option 163 ² | Alpha 1:16 CWDM De-/Multiplexer; CWDM Channels 1...16 |
| Option 16 | Redundant Power Supply |
| Option 55 ¹ | Change Ethernet to optical Ethernet Interface |
| Option 59 ² | CPU for Monitoring and Control via Web Interface and via SNMP |
| Option 77 ¹ | Signal Recording |
| Option 89 | Pole Mount Assembly |

Note 1: DEV 7187 in combination with Option 59 only

Note 2: DEV 7187 only

Contact

DEV Systemtechnik GmbH

Grüner Weg 4A

61169 Friedberg

GERMANY

Phone: +49 6031 6975 100

Fax: +49 6031 6975 114

info@dev-systemtechnik.com

www.dev-systemtechnik.com

Rev. 20-Nov-2019

Disclaimer

The information contained herein is believed to be reliable. DEV Systemtechnik makes no warranties regarding the information contained herein. DEV Systemtechnik assumes no responsibility or liability whatsoever for any of the information and for the use of the information contained herein. The information contained herein is provided "AS IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders.