

# Optiva Next-Gen OTS-1LNG 3 GHz/6 GHz 1310 nm Wideband Fiber Optic Link

emcore®

PRELIMINARY DATASHEET | AUGUST 2020

SATCOM



The Optiva OTS-1LNG 3 GHz/6 GHz 1310 nm Wideband Fiber Optic Link is a Next-Gen L-Band fiber optic link optimized to provide transparent IF, extended L-Band, C- and S-Band signal transport and to perform in the 50 MHz to 6 GHz frequency range for satellite antenna and interfacility applications.



Optiva satellite and microwave transmitters and receivers are SNMP compliant. They can be housed in the same chassis and monitored by the same Network Management System (NMS) to provide multiple frequency transport in a single flexible platform.

## Applications

- Satellite Antenna Signal Transport
- DBS Antenna Signal Distribution
- Interfacility Signal Transport

## Features

- 50 MHz to 6 GHz Optimized for IF, Extended L-Band, S- and C-Band Satellite Signals
- 30 dB Tx and Rx Adjustable Gain Range
- Peak Optimizer for Quick and Easy Setup
- SmartGain for Enhanced AGC Performance
- 50 Ohm SMA, BNC and 75 Ohm BNC
- Tx & Rx RF Power Monitors via LED, SMA & SNMP
- SNMP Monitoring and Control
- Optically-Isolated Uncooled DFB Lasers
- Fits in Optiva Enclosures -16, 6, 2, & 1 Slot Enclosures Available
- CE & CSA Certified, RoHS Compliant


## System Design

The Optiva platform includes a wide range fiber optic transport products for satellite and microwave communications from 1 MHz to 60 GHz. These units can be used to construct transparent inter- and intra-facility links from 1 meter to >100 km for RF and microwave signal transport, antenna remoting, electronic warfare systems and other high-dynamic-range applications.

optiva PLATFORM

Optiva is a completely modular, hot-swappable platform. Both 19" rack-mount and compact tabletop, or wall-mountable enclosures are available. The 3 RU 19" rack-mount, fan-cooled enclosures (Model OT-CC-16 and OT-CC-16F) can support up to 16 insert cards and utilize two dual-redundant, hot-swappable, 200 watt power supplies. The 1 RU 19" rack-mount, fan-cooled enclosure (Model: OT-CC-6-1U) can accommodate 6 insert cards and utilizes two hot-swappable 60 watt power supplies. Compact one-slot (OT-DTCR-1), or two-slot (OT-DTCR-2) enclosures are also available that use an external wall-mount power supply.

## Block Diagram

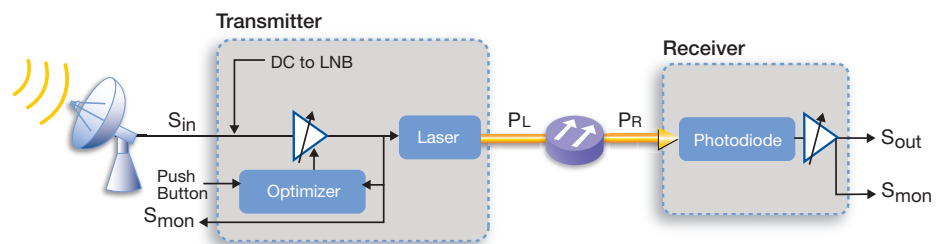

# Optiva Next-Gen OTS-1LNG 3 GHz/6 GHz 1310 nm Wideband Fiber Optic Link


## Performance Highlights<sup>5</sup>

	Parameter	Min	Typical	Max	Units
Link <sup>1</sup>	Frequency Range				
	50 Ohm	50	-	6000	MHz
	75 Ohm	50	-	2500	MHz
	Frequency Response				
	Any 36 MHz	-	-	± 0.2	dB
	50 - 2500 MHz	-	-	± 1.5	dB
	50 - 6000 MHz (50 Ohm only)	-	-	± 2.0	dB
Noise Figure (TG max, RG max, 1.5 GHz)	-	17	-	dB	
Input IP3 (TG max, 1.5 GHz)	-	3	-	dBm	
Spur Free Dynamic Range <sup>6</sup>	-	106	-	dB/Hz <sup>2/3</sup>	
Link Gain (TG max, RG max) Next-Gen Tx/Rx	-	23	-	dB	
Tx	RF Input within SGC (Smart Gain Control) Range				
	RF Input without SGC	-30	0 to -25	0	dBm
	Tx Gain (TG) max, 1.5 GHz	-	-1	-	dB (W/A)
	TG Adjustment Range (from max)	-	-	31	dB
	Optical Output	6	7	8	dBmo
	Wavelength	1270	-	1610	nm
	Input Return Loss				
	50-3000 MHz	-	-	-13	dB
	50-6000 MHz (50 Ohm only)	-	-	-10	dB
	LNB Bias				
	Voltage - 13/18 - V	-	13/18	-	V
	Current Limiting Threshold 350 - 550 mA	350	-	550	mA
	Tone	-	22	-	KHz
DC Power Supply					
Voltage	-	12	-	V	
Current Consumption (LNB OFF)	-	-	260	mA	
Current Consumption (LNB ON)	-	-	1010	mA	
Rx	Optical Input				
	Next-Gen Rx	-25 <sup>4</sup>	-	9	dBmo
	Rx Gain (RG) max, 1.5 GHz	-	24	-	dB (A/W)
	RG Adjustment Range (from max)	-	-	31	dB
	OIP3 IP3 (6 dBmo to Rx, 0 dBm 3000MHz)	23	25	-	dBm
	RF Output Return Loss				
	50-3000 MHz	-	-	-14	dB
50-6000 MHz (50 Ohm only)	-	-	-10	dB	
DC Power					
Voltage	-	12	-	V	
Current Consumption	-	-	190	mA	

**\*Note**


- For link over 1 meter fiber jumper
- Wider RF inputs are acceptable, but will set the RF amp gain to its limit
- Link RF Gain dB = TG + RG - 2 \* Fiber Loss dBo (assumes R<sub>in</sub> = R<sub>out</sub>)
- Minimum optical input to maintain 35 dB C/N on 36 MHz RF carrier over 1 meter fiber jumper
- Performance at ambient temperature (unless specified otherwise)
- SFDR = 2/3 \* (IIP3 + 174 - NF)
- Some specifications in the table may degrade when operating at low input

## OTS-Next-Gen (Tx & Rx)

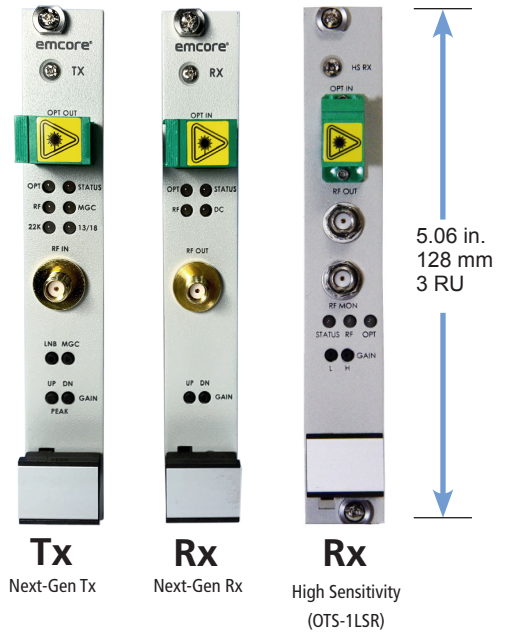

## Typical S21

### Frequency Response

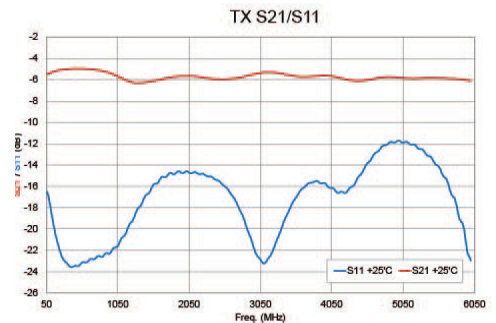

# Optiva Next-Gen OTS-1LNG 3 GHz/6 GHz 1310 nm Wideband Fiber Optic Link



PRELIMINARY DATASHEET | AUGUST 2020


SATCOM

## Absolute Maximum Rating\*

Parameter	Min	Typ	Max	Unit
Operating Temperature	-20	-	60	°C
Max Tx RF Input (TG min)	-	-	+15	dBm
Max Rx Optical Input	-	-	+10	dBm

\*Damage may occur beyond these limits

## Enclosure Options

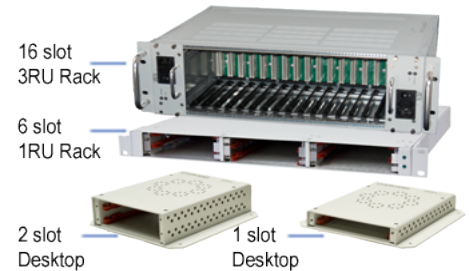

## Ordering Information

Product Code	Specifications
OTS-1LNG6T/S5-1306-SA-IC	Transmitter, 50-6000 MHz, SMA 50 ohm, 1310 nm, 6 dBm, SC/APC
OTS-1LNG3T/S5-1306-SA-IC	Transmitter, 50-3000 MHz, BNC 50 ohm, 1310 nm, 6 dBm, SC/APC
OTS-1LNG3T/B7-1306-SA-IC	Transmitter, 50-2500 MHz, BNC 75 ohm, 1310 nm, 6 dBm, SC/APC
OTS-1LNG6R/S5-SA-IC	Receiver, 50-6000 MHz, SMA 50 ohm, SC/APC
OTS-1LNG3R/S5-SA-IC	Receiver, 50-3000 MHz, BNC 50 ohm, SC/APC
OTS-1LNG3R/B7-SA-IC	Receiver, 50-2500 MHz, BNC 75 ohm, SC/APC
OPV-CTLR-IC	NMS SNMP Controller Card, MIB, EmcoreView GUI for Optiva Family
OTP-1ETR-A2/A2	Optical Transceiver 1CH, Ethernet, SM, Dual LC -- See OTP-1E datasheet
OT-CC-16F-XXX	Chassis, Rack-Mount, 16-Slot, 3 RU -- See OT-CC-16F datasheet
PS-200F-XX	Power Supply, 12 VDC, 100 to 240 VAC, 50/60 Hz. -- See PS-200F datasheet
OT-CC-6-XX	Chassis, Rack-Mount, 6-Slot, 1RU -- See OT-CC-6 datasheet
OT-DTCR-1 / OT-DTCR-2	Chassis, Flange-Mount, w/Power Supply, 1 slot / 2 slot

## Laser Safety

This product meets the appropriate standard in Title 21 of the Code of Federal Regulations (CFR). FDA/CDRH Class 1M laser product. This device has been classified with the FDA/CDRH under accession number 0220191. All versions of this laser are Class 1M laser product, tested according to IEC 60825-1:2007 / EN 60825-1:2007. An additional warning for Class 1M laser products. For diverging beams, this warning shall state that viewing the laser output with certain optical instruments (for example: eye loupes, magnifiers, and microscopes) within a distance of 100 mm may pose an eye hazard. For collimated beams, this warning shall state that viewing the laser output with certain instruments designed for use at a distance (for example: telescopes and binoculars) may pose an eye hazard.

Wavelength = 1.3/1.5  $\mu\text{m}$ .

Maximum power = 30 mW.



\*Caution - Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

\*IEC is a registered trademark of the International Electrotechnical Commission.

