



Features

- Supports GNSS, GALILEO, GLONASS
- -20°C to +65°C Operating Temperature Range
- Compact Handheld Device
- Rechargeable via USB Port
- Device for Data Capture
- SMA RF Connector
- Can tracks up to 16 Satellites Simultaneously
- Easily connect to a Laptop or Android Smart Device for data capture
- Now Featuring Bluetooth™ Connectivity Capability*
(*Windows & Android only)

Applications

- RF GPS Signal Presence
- GPS Antenna Functionality
- Optical Receiver Functionality
- Install Validation and “Birth Certificate” Data for Closeout packages
- Truly “Neutral” Testing Device



Compatible with:
- PC - Windows OS
- APP- Android OS

ZONUSKYSHOT GPS TESTER

Description

The ZonuSkyShot GPS Tester is a compact GPS receiver that detects the presence, and the signal strength of a GPS signal. The ZONUSkyShot can identify up to sixteen satellites as received by the installed antenna. ZONUSkyShot can connect via USB or Bluetooth™ to any Windows OS-capable PC or Smart Device (i.e. phone or tablet) operating on the ANDROID OS. With this connectivity, the ZONUSkyshot can report the number of Satellites visible to the receiver showing signal strength individually for up to 16 satellites; and display it on the connected devices screen.

Furthermore, this GPS receiver can be accessed at the USB port on the Base Unit, or via a Bluetooth™ device allowing the user to see the available satellites using the app provided with the system and available at the Optical Zonu website. The receiver can simultaneously track up to 16 satellites while searching for new ones. An example is shown in the following page. This feature permits verifying the OZC GPS over Fiber solution independent of any other equipment. However this test device is truly neutral, and gives measurements at the antenna, or after a coax run; simply connect the ZonuSkyShot to any RF output of an Optical Zonu GPS Fiber Transport, GPS at the Edge or GPS Over Fiber with the short SMA RF jumper. The unit can be plugged into AC power with the AC adaptor included to charge the internal lithium-Ion battery.

If the GPS signal is being received, the GPS LED will blink green. For more detail, a laptop can be connected to the unit via the micro USB port, or using our “New” Bluetooth™ feature, the constellation and received signal levels for all visible GPS satellites are shown.

The ZonuSkyShot has an internal battery which is recharged with an AC adaptor, included. There is an auto off feature to save battery power. Sufficient battery charge is indicated by a green PWR LED.

All of the OZC GPS RF over Fiber Solutions provide the most comprehensive monitoring and alarming functionality available with minimum complexity.

See patent number US 10,257,739 B1.


SkyShot Features




SkyShot User Interface

Connecting the Skyshot - The user interface can be accessed using a micro USB port with a PC Windows OS laptop or Bluetooth™ enable smart device with Android OS, permitting the user to see the signal quality of the satellites being tracked along with the position data using the application included. The unit uses rechargeable battery power and can be plugged into computer USB power or AC power with the AC adaptor included. Battery power is indicated by the three LED's. If the GPS signal is being received, the GPS Lock LED will blink Green.


Bluetooth™ Compatible with: PC - Windows OS and APP- Android OS

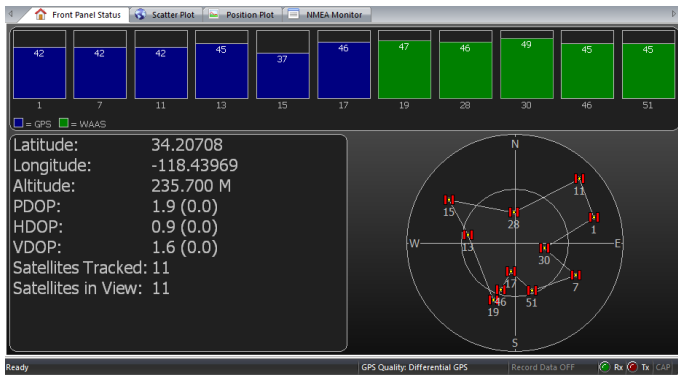

PC - Windows OS

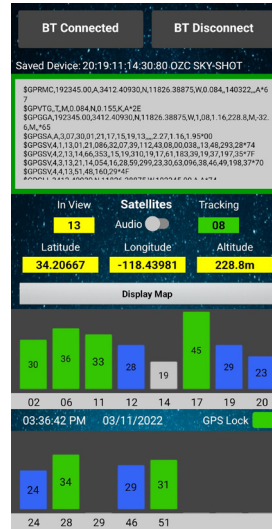

APP- Android OS

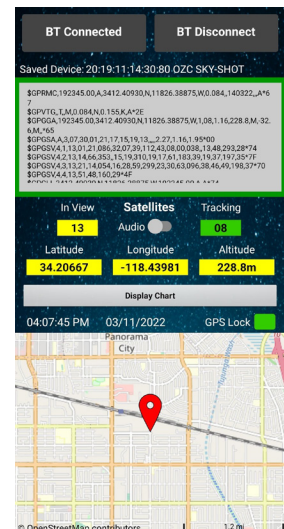

LED Definitions

LED	GPS	GREEN	GREEN BLINKING	AMBER	RED
GPS Lock	No GPS Lock	-	GPS Lock	-	-
Bias	-	Active	-	Not Active	-
Power	Off	ON	-	-	Insufficient Battery

* See manual for charging LED legend.

Mechanical Parameters

Dimensions	3.0" x 2.75" x 1.0"				
Connectors	RF	SMA(F)	Power/Data	Micro-USB	

Ordering Information

ATI-GPSI-BT (GPS Bluetooth™ Tester only)

ATI-GPSI-BT-KIT (Complete Kit with Case)

ZAI-I-05-10-USB (AC to 5VDC Power Supply, 1A, 5W, Micro USB)

Z222-0195-SS-SS-12 (RF Jumper, 24", SMA(m) to SMA(m))



Related Products

[Z600 GPS Transmitter/Receiver Standalone Modules, L1/L2, Transmitter LNA/Bias-T, Receiver Antenna Load, Optional CWDM](#)

[GPS Fiber Transport, Rugged IP67 Antenna Unit, Auto-Switchover Redundancy Option, 8/16 GPS Output Optical Receivers](#)

[J-Chassis, 19" 1RU, 5 or 10 Slot, JS14 Managed RFoF Capability](#)

Additional Resources

[GPS Over Fiber Link](#)

[GPS Timing Distribution, Carrier Grade Transport](#)

[Standalone RF Over Fiber Modules](#)

[RF Over Fiber Rack Mount Integrated Subsystems](#)

[RF Over Fiber Rack Mount Modular Subsystems](#)

[RF Over Fiber Applications](#)

[19" 1RU J-Chassis](#)

[19" 3RU J3U Chassis](#)

[19" 1RU OZC9500 Chassis](#)

Contacts

HEADQUARTERS

7510 Hazeltine Avenue, Van Nuys, CA 91405

Main: 818-780-9701 Fax: 818-780-9739 info@opticalzonu.com

INSIDE SALES

818-780-9701 x122 ;
818-616-2043
sales@opticalzonu.com

CUSTOMER SUPPORT

818-780-9701 x276 ;
818-452-5131
support@opticalzonu.com

SALES - RF

818-780-9701 x122 ;
818-579-9630
sales@opticalzonu.com

SALES - RF EAST

818-780-9701 x140 ;
818-579-9594
sales@opticalzonu.com

SALES - SATCOM

818-780-9701 x242 ;
818-452-5896
sales@opticalzonu.com

SALES - DIGITAL

818-780-9701 x131 ;
818-579-9592
sales@opticalzonu.com

TECHNICAL SUPPORT

818-780-9701 x134 ;
818-579-2359
support@opticalzonu.com

